


## CHELMSFORD STRAIGHT



WHITE BLACK CHROME WORKING PRESSURE WORKING TEMP. CLOSED SYSTEM MOUNT POS. WARRANTY

Product Name	Height mm	Length mm	Depth mm	Pipe Centres mm	Wall to Pipe Centre mm	Wall to Face mm	Water Content lt	Gross Weight kg	Fuel Options E/H/D	Towel Gaps	Heat Output ΔT 50		Finish		
											BTU	Watts	White W	Black B	Chrome C
3M8	790	310	30	270	70-80	85-95	2.7	5.6	E/H/D	2	1007	295	✓		✓
3M12	1195	310	30	270	70-80	85-95	4.1	8.2	E/H/D	3	1509	442	✓		✓
4M7	700	420	30	380	70-80	85-95	3.0	6.2	E/H/D	1	1059	310	✓		✓
4M9	900	420	30	380	70-80	85-95	3.8	7.7	E/H/D	2	1363	399	✓		✓
4M12	1200	420	30	380	70-80	85-95	5.3	10.6	E/H/D	2	1892	554	✓		✓
4M15	1467	420	30	380	70-80	85-95	6.2	12.3	E/H/D	3	2220	650	✓		✓
5M7	764	500	30	460	70-80	85-95	3.8	7.6	E/H/D	1	1124	329	✓	✓	✓
5M9	900	500	30	460	70-80	85-95	4.3	8.8	E/H/D	2	1339	392	✓		✓
5M11	1172	500	30	460	70-80	85-95	5.7	11.3	E/H/D	2	1964	575	✓	✓	✓
5M15	1467	500	30	460	70-80	85-95	7.1	14.0	E/H/D	3	2544	745	✓		✓
5M17	1750	500	30	460	70-80	85-95	8.6	16.9	E/H/D	3	3070	899	✓	✓	✓
6M7	764	600	30	560	70-80	85-95	4.3	8.8	E/H/D	1	1520	445	✓	✓	✓
6M9	900	600	30	560	70-80	85-95	5.0	10.1	E/H/D	2	1807	529	✓		✓
6M11	1172	600	30	560	70-80	85-95	6.5	13.0	E/H/D	2	2278	667	✓	✓	✓
6M15	1467	600	30	560	70-80	85-95	8.1	16.1	E/H/D	3	2974	871	✓		✓
6M17	1750	600	30	560	70-80	85-95	9.9	19.5	E/H/D	3	3579	1048	✓	✓	✓
7M7	764	750	30	710	70-80	85-95	5.2	10.5	E/H/D	1	1899	556	✓		✓
7M11	1172	750	30	710	70-80	85-95	7.8	15.6	E/H/D	2	2848	834	✓		✓
7M17	1750	750	30	710	70-80	85-95	11.8	23.4	E/H/D	3	4474	1310	✓		✓

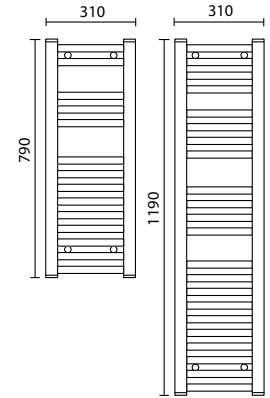

## CHELMSFORD ARCHED



WHITE CHROME WORKING PRESSURE WORKING TEMP. CLOSED SYSTEM MOUNT POS. WARRANTY

Product Name	Height mm	Length mm	Depth mm	Pipe Centres mm	Wall to Pipe Centre mm	Wall to Face mm	Water Content lt	Gross Weight kg	Fuel Options E/H/D	Towel Gaps	Heat Output ΔT 50		Finish	
											BTU	Watts	White W	Chrome C
4MA7	700	420	55	380	75-85	100-110	3.1	6.4	E/H/D	1	1069	313	✓	✓
4MA9	900	420	55	380	75-85	100-110	3.9	7.9	E/H/D	2	1369	401	✓	✓
4MA12	1200	420	55	380	75-85	100-110	5.2	10.5	E/H/D	2	1902	557	✓	✓
5MA7	764	500	60	460	75-85	100-110	3.8	7.8	E/H/D	1	1130	331	✓	✓
5MA11	1172	500	60	460	55-65	95-110	5.7	11.5	E/H/D	2	1974	578	✓	✓
5MA15	1467	500	60	460	75-85	100-110	7.1	14.2	E/H/D	3	2558	749	✓	✓
5MA17	1750	500	60	460	75-85	100-110	8.7	17.2	E/H/D	3	3084	903	✓	✓
6MA7	764	600	65	560	75-85	100-110	4.3	9.0	E/H/D	1	1527	447	✓	✓
6MA11	1172	600	65	560	55-65	95-110	6.6	13.3	E/H/D	2	2288	670	✓	✓
6MA15	1467	600	65	560	75-85	100-110	8.2	16.4	E/H/D	3	2988	875	✓	✓
6MA17	1750	600	65	560	75-85	100-110	9.9	19.8	E/H/D	3	3596	1053	✓	✓
7MA7	764	750	70	710	75-85	100-110	5.2	10.8	E/H/D	1	1909	559	✓	✓
7MA11	1172	750	70	710	55-65	95-110	7.8	15.9	E/H/D	2	2862	838	✓	✓
7MA17	1750	750	70	710	75-85	100-110	11.9	23.8	E/H/D	3	4498	1317	✓	✓

