



Model shown: AB1695-SLUM in daylight

Model shown: AB1695-SLUM at night

# ABACUS

Who says heating has to be dull? Vibrant, colourful design; perfect for fun-lovers and children's nurseries. Bright globes contrast with sleek stainless steel tubes: a feast for the eyes.


Model shown on opposite page: AB16-95RAL-vari

## ABACUS

SS MATERIAL   
 10 WORKING PRESSURE   
 120°C WORKING TEMP.   
 O C OPEN/CLOSED SYSTEM   
 V MOUNT POSITION   
 20 YEARS WARRANTY

| Product Name  | Height (mm) | Length (mm) | Depth (mm) | Fuel Options (E/H/D) | Pipes or Sections | Heat Output (BTU/w) ΔT 50 |      | E: Electric only<br>Choice of Elements (Watts) |     | Finish                         |
|---------------|-------------|-------------|------------|----------------------|-------------------|---------------------------|------|--|-----|--------------------------------|
|               |             |             |            |                      |                   | 3349                      | 982  | 340  | 400 | S: Brushed Matt<br>P: Polished |
| AB1070-SRAL   | 950         | 460         | 45         | E/H/D                | 10                | 3349                      | 982  | 340  | 400 | S                              |
| AB1070-SRAL-v | 950         | 460         | 45         | E/H/D                | 10                | 3349                      | 982  | 340  | 400 | S                              |
| AB1070-SSIL   | 950         | 460         | 45         | E/H/D                | 10                | 3349                      | 982  | 340  | 400 | S                              |
| AB1070-SLUM   | 950         | 460         | 45         | E/H/D                | 10                | 3349                      | 982  | 340  | 400 | S                              |
| AB1070-SG     | 950         | 460         | 45         | E/H/D                | 10                | 3349                      | 982  | 340  | 400 | S                              |
| AB1695-SRAL   | 1600        | 460         | 45         | E/H/D                | 10                | 5159                      | 1513 | 400  | 600 | S                              |
| AB1695-SRAL-v | 1600        | 460         | 45         | E/H/D                | 10                | 5159                      | 1513 | 400  | 600 | S                              |
| AB1695-SSIL   | 1600        | 460         | 45         | E/H/D                | 10                | 5159                      | 1513 | 400  | 600 | S                              |
| AB1695-SLUM   | 1600        | 460         | 45         | E/H/D                | 10                | 5159                      | 1513 | 400  | 600 | S                              |
| AB1695-SG     | 1600        | 460         | 45         | E/H/D                | 10                | 5159                      | 1513 | 400  | 600 | S                              |


We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

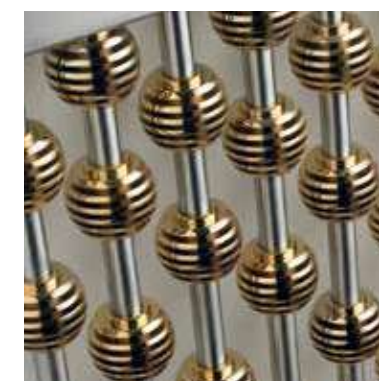

GOLD



SILVER

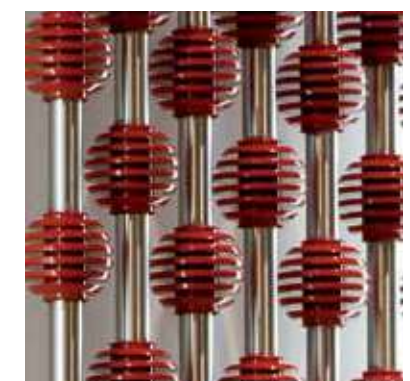

RED

Call us on 01908 271155 or visit [www.aeon.uk.com](http://www.aeon.uk.com)