



## SERIF

Beautiful stainless steel combined with great design credentials. The distinctively architectural lines of this towel rail's chunky rows and dramatic columns give it an enduring, no-nonsense appeal.


Model shown: Opposite page: SRF5S12-S (brushed matt)

### SERIF

SS MATERIAL   
 10 WORKING PRESSURE   
 120°C WORKING TEMP.   
 O C OPEN/CLOSED SYSTEM   
 V MOUNT POSITION   
 20 YEARS WARRANTY

Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only Choice of Elements (Watts)		Finish S: Brushed Matt P: Polished
							1200	1660	300	400	
SRF5S8	785	550	40	E/H/D	2	14	1289	378	300	400	S, P
SRF5S12	1200	550	40	E/H/D	3	21	1933	567	400	600	S, P
SRF5S17	1660	550	40	E/H/D	4	29	2670	783	600	900	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

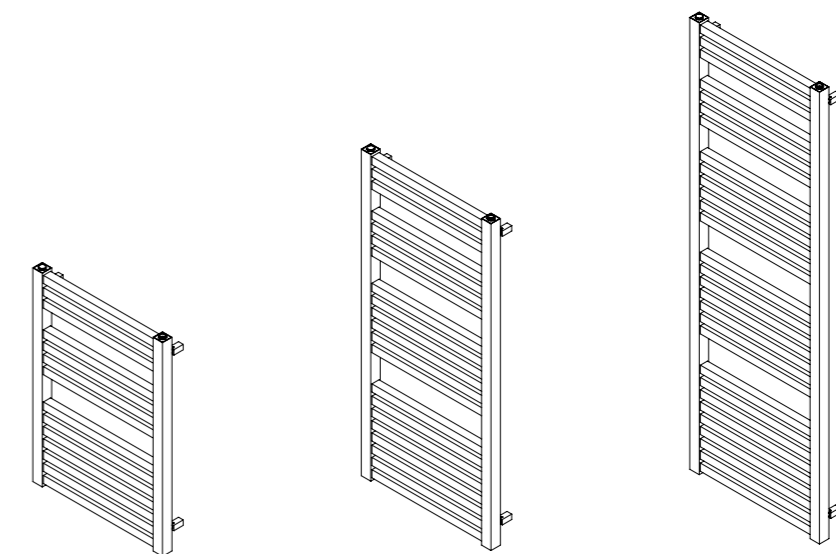

Call us on 01908 271155 or visit [www.aeon.uk.com](http://www.aeon.uk.com)