



# TUBO

Quirky isn't the word. The fun combination of wide tubular rows connected to two slim columns is sure to please, and is versatile enough to suit any style of bathroom.


**I** Model shown on opposite page: TUB508-S (brushed matt) Above Left: TUB506-P (polished)

## TUBO

SS MATERIAL   
 10 WORKING PRESSURE   
 120°C WORKING TEMP.   
 O C OPEN/CLOSED SYSTEM   
 V MOUNT POSITION   
 20 YEARS WARRANTY

Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Towel Gaps	Pipes or Sections	Heat Output (BTU/w) ΔT 50		E: Electric only	Finish S: Brushed Matt P: Polished
									Choice of Elements (Watts)	
TUB506	705	500	60	E/H/D	2	12	1496	438	300	S, P
TUB508	990	500	60	E/H/D	3	16	1994	584	400	S, P
TUB510	1275	500	60	E/H/D	4	20	2493	730	400	S, P
TUB512	1560	500	60	E/H/D	5	24	2992	876	2x340	S, P

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

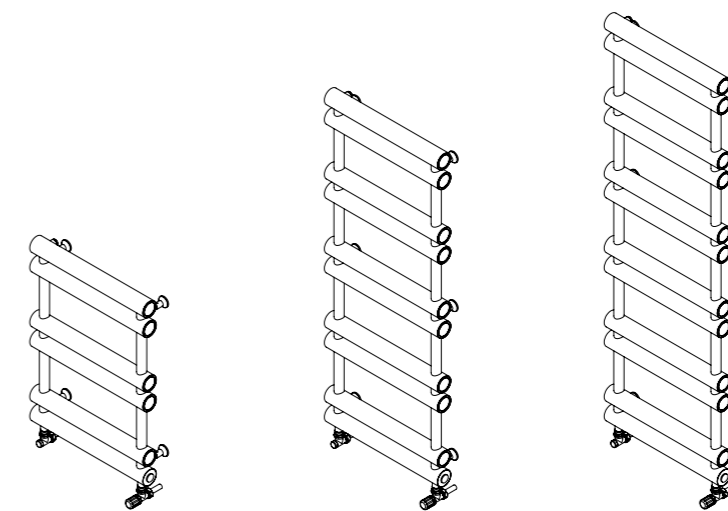

Call us on 01908 271155 or visit [www.aeon.uk.com](http://www.aeon.uk.com)