



TUDOR

Quality fit for a King. This towel rail looks simple, but it has been carefully designed for maximum heating performance and capacity. Just don't lose your head deciding where to put it.


T Model shown on opposite page: TDR412-P (polished)

TUDOR

SS MATERIAL
 10 WORKING PRESSURE
 120°C WORKING TEMP.
 O C OPEN/CLOSED SYSTEM
 V MOUNT POSITION
 20 YEARS WARRANTY

| Product Name | Height (mm) | Length (mm) | Depth (mm) | Fuel Options (E/H/D) | Towel Gaps | Pipes or Sections | Heat Output (BTU/w) ΔT 50 | | E: Electric only Choice of Elements (Watts) | | Finish S: Brushed Matt P: Polished |
|--------------|-------------|-------------|------------|----------------------|------------|-------------------|---------------------------|-----|--|-----|--|
| | | | | | | | | | | | |
| TDR408 | 800 | 420 | 100 | E/H/D | 2 | 3 | 642 | 188 | 400 | | S, P |
| TDR412 | 1200 | 420 | 100 | E/H/D | 3 | 4 | 857 | 251 | 600 | | S, P |
| TDR508 | 800 | 520 | 100 | E/H/D | 2 | 3 | 693 | 203 | 400 | | S, P |
| TDR512 | 1200 | 520 | 100 | E/H/D | 3 | 4 | 926 | 271 | 400 | 600 | S, P |
| TDR608 | 800 | 620 | 100 | E/H/D | 2 | 3 | 748 | 219 | 400 | 600 | S, P |
| TDR612 | 1200 | 620 | 100 | E/H/D | 3 | 4 | 1001 | 293 | 400 | 600 | S, P |

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

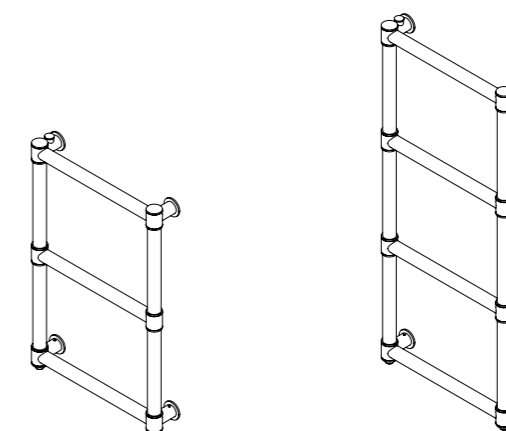

Call us on 01908 271155 or visit www.aeon.uk.com