



## ARMADA

Striking, majestic and bold. This radiator will put you and your home firmly on the map. The versatile design allows great flexibility in the choice of length and number of columns.


**i** Model shown on opposite page: ARM1821-S (brushed matt) Above left: ARM1821-P (polished) Above right: ARM1821-G (brushed matt with gold laminated discs)

### ARMADA

SS MATERIAL   
 10 WORKING PRESSURE   
 120°C WORKING TEMP.   
 O C OPEN/CLOSED SYSTEM   
 V H MOUNT POSITION   
 20 YEARS WARRANTY

Product Name	Height (mm)	Length (mm)	Depth (mm)	Fuel Options (E/H/D)	Pipes or Sections	Heat Output (BTU/w) ΔT 50	E: Electric only		Finish	
							Choice of Elements (Watts)		S: Brushed Matt	P: Polished
ARM1221	1200	210	95	E/H/D	4	1804 528	300	400	S, P, G	
ARM1521	1500	210	95	E/H/D	4	2295 672	300	400	S, P, G	
ARM1821	1800	210	95	E/H/D	4	2785 816	400	600	S, P, G	
ARM1247	1200	470	95	E/H/D	8	3609 1057	2 x 300		S, P, G	
ARM1547	1500	470	95	E/H/D	8	4590 1344	2 x 400		S, P, G	
ARM1847	1800	470	95	E/H/D	8	5571 1631	2 x 600		S, P, G	

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of "T" piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

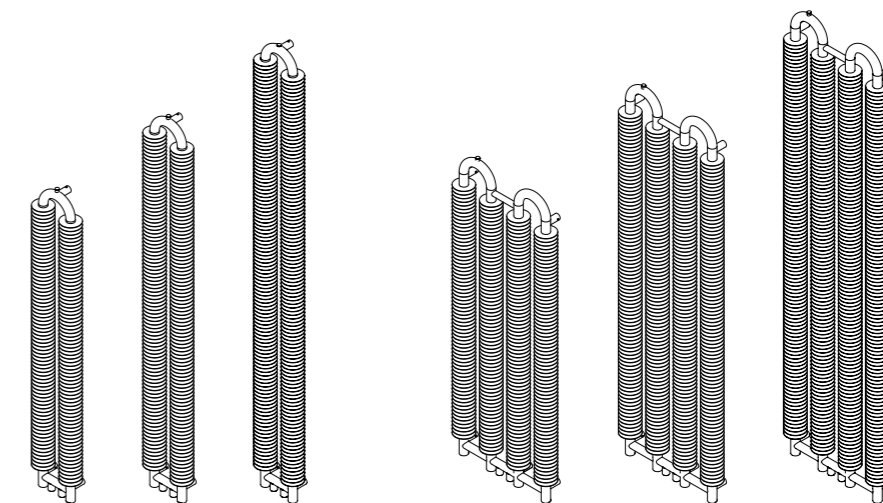

Call us on 01908 271155 or visit [www.aeon.uk.com](http://www.aeon.uk.com)